

Contamination Control Mats




Full service for your SimStep® - right from the start.

Advice, planning, project management.

We accompany you through to professional installation by our trained installation team for your SimStep® project. In addition, we can regularly check the performance of the installed SimStep® mats directly at your site on request.

Ask for your individual offer!

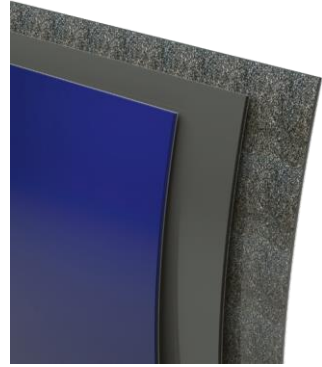

SimStep®

- Length: 100-1000 cm
(can be ordered in increments of 100, +6.4 cm border material per side), but can easily be cut to desired dimensions
- Thickness: approx. 2 mm
- Strong conductive properties
- Load capacity: approx. 90 kg/cm²
- Heat resistance: 0-52°C
- In addition to the mat, the scope of delivery also includes bonding and edging material

Size (Width) Item no.

200 cm. 350200
 120 cm 350202



SimStep® Tough

- Length: 100-1000 cm
(can be ordered in increments of 100, +6.4 cm border material per side), but can easily be cut to desired dimensions
- Thickness: approx. 4 mm
- Strong conductive properties
- Load capacity: approx. 130 kg/cm²
- Heat resistance: 0-52°C
- In addition to the mat, the scope of delivery also includes bonding and edging material

Size (Width) Item no.

200 cm 350210
 120 cm 350209



Sticky Mats



SIMTACK®

- Material: Polyethylene film
- Normal adhesive strength
- Total thickness: approx. 1.5 mm
- Thickness single: approx. 0,045mm
- Water-based adhesive
- RoHs conform
- With indicator for remaining film on the mat
- 30 layers with indicator
- 1 mat with 30 layers of film, 4 mats in a carton

Size	Item no.
660 x 1140 mm (white) 350100
450 x 1140 mm (white) 350102
660 x 1140 mm (blue) 350104
450 x 1140 mm (blue) 350106



SIMTACK® HT

- Material: Polyethylene film
- White
- Increased adhesive strength
- Total thickness: approx. 1.5 mm
- Thickness single: approx. 0,045mm
- Water-based adhesive
- RoHs conform
- With indicator for remaining film on the mat
- 30 layers with indicator
- 1 mat with 30 layers of film, 4 mats in a carton

Size	Item no.
660 x 1140 mm 350101





SIMTACK® Antistatic

- Material: Polyethylene film
- White
- Normal adhesive strength
- Antistatic material properties
- Total thickness: approx. 1.5 mm
- Thickness single: approx. 0,045mm
- Water-based adhesive
- RoHs conform
- With indicator for remaining film on the mat
- 30 layers with indicator
- 1 mat with 30 layers of film, 4 mats in a carton

Size Item no.
660 x 1140 mm 350110

SIMTACK®